


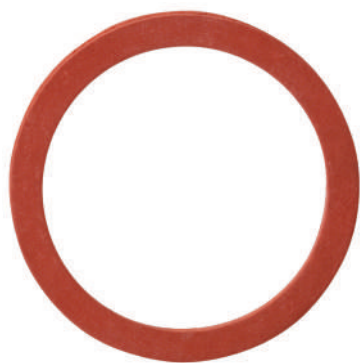

Materiale Plastica, rinforzata con fibra di vetro

Temperatura di impiego da -60°C a +105°C

RoHS

Adatto per AG	D mm	d mm	s mm	Art.
M16 x 1,5	24	16,1	1,5	1.326.1600.50
M20 x 1,5	28,5	20,5	1,5	1.326.2000.50
M25 x 1,5	36,5	25,5	1,6	1.326.2500.50
M32 x 1,5	42,5	32,5	1,6	1.326.3200.50
M40 x 1,5	51,5	40	1,5	1.326.4000.50
M50 x 1,5	61,5	51	1,6	1.326.5000.50
M63 x 1,5	76	63,5	1,6	1.326.6300.50
M75 x 1,5	87,5	75,5	1,8	1.326.7500.50
NPT 3/8"	25,5	17,5	1,5	1.326.3800.70
NPT 1/2"	30	22	1,5	1.326.1200.70
NPT 3/4"	33,5	26,5	1,5	1.326.3400.70
NPT 1"	42,5	34	1,6	1.326.1000.70
NPT 1 1/4"	52	42,5	1,6	1.326.5400.70
NPT 1 1/2"	58,7	50	1,5	1.326.6400.70
NPT 2"	69,5	60,8	1,6	1.326.2000.70
NPT 2 1/2"	83	73,8	1,5	1.326.5200.70
NPT 3"	115,5	91,5	1,8	1.326.3000.70